

GOAL ZERO
YETI¹²⁵⁰ SOLAR GENERATOR KIT
GENERATOR + SOLAR PANELS

Recharge your Goal Zero Yeti 1250 from the sun faster by adding another Boulder 30 Solar Panel to your array. From June 9th through July 7th, when you purchase a Goal Zero Yeti 1250 Kit, we'll throw in an extra Boulder 30 Solar Panel (a \$240 value).



SKU: 39004
 MAP: \$1799.95

HOW IT CHARGES



FROM THE SUN
 40 Hours



FROM THE WALL
 18 Hours



FROM 12 VOLT
 11 Hours

WHAT IT POWERS



12V LIGHT
 400+ Hours



SMARTPHONE
 100+ Recharges



TV
 12 Hours




FRIDGE
 20+ Hours


USB, 12V and AC powered devices like:
 Smartphones, Lights, Laptops, TVs, AND MORE

GOAL ZERO YETI¹²⁵⁰ SOLAR GENERATOR

HOW IT WORKS

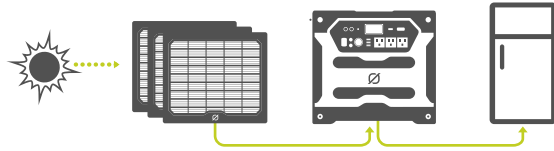

- A** Solar/DC Inputs
- B** Anderson-type Input
- C** Battery Display
- D** Backlight for Display
- E** Master Power Switch
- F** Anderson-type Output
- G** 12V Outputs
- H** USB Outputs
- I** AC Outputs

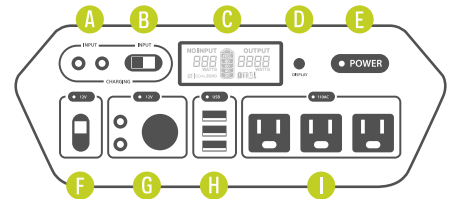

TECHNICAL SPECIFICATIONS

CHARGE TIME:

- Wall charger: 18 Hrs
- Car Charger: 44 Hrs
- (3) Boulder 30 Solar Panels: 27-54 Hrs

BATTERY:

- Type: AGM Lead Acid
- Capacity: 1200Wh (12V, 100Ah)
- Management system: MPPT charge controller, low-battery protection

OUTPUTS:

- (3) USB port: 5V, up to 2 (10W)
- (2) 12V port (6.0mm): 12V, up to 10A (120W max)
- 12V car port: 12V, up to 10A (120W max)
- 12V Power Pole: 12-14V, up to 30A (360W)
- (3) AC outlets: 110V, 10.4A, (1200W continuous, 1500W peak), pure-sine wave

INPUT:

- (2) Charging port: 15V, up to 5A (75W)
- Power Pole: 16-48V, up to 20A (240W)

GENERAL:

- Weight: 103lbs (46.7kg)
- Dimensions: 16 x 11.5 x 14.5in (410 x 305 x 370 cm)
- Chainable: Yes
- Certs: CE, FCC, RoHS



Power Your Camp



Power Your Emergency



Power Your Life